





miniature, low-voltage lighting system


MIKRUS S

MIKRUS S /system/

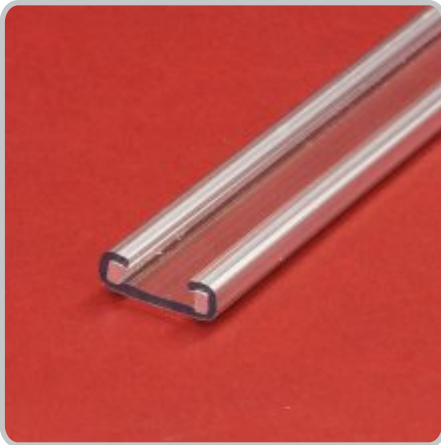


profile MIKRUS S
transparent
500 - 94010000
1000 - 94020000
2000 - 94030000



elements



MIKRUS S connector I
94060000



MIKRUS S ending
94050000

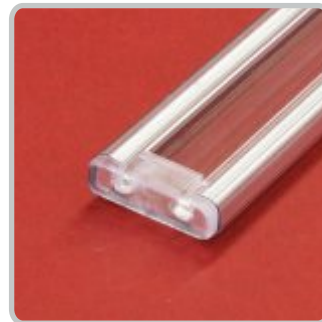

MIKRUS S power supply
94040000

components

MIKRUS S is a miniature, low-voltage lighting system for show cases and shop windows.


The system consists of lighting track from high-quality material, spotlights (LED and halogen) and accessories for assembly and power supply.

Great flexibility and possibility of individual settings works perfectly in jewelry showcases, museum exhibitions, libraries ...



LED power supplies:
6W - KPB-6F
10W - KLP-1018HV
12W - 15560000
20W - 15640000
50W - 15650000
75W - 15570001



Halogen power supplies:
70W - 15300000
105W - 15310000
150W - 15320000
210W - 15410000
250W - 15330000

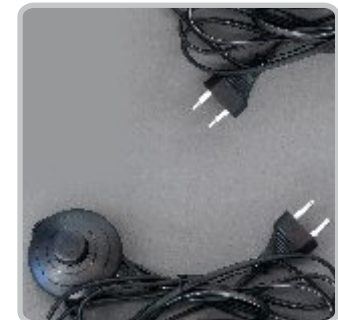

Power supply cable:
- for power supply 4m with plug - 8500000020
- with footswitch - C001342



MIKRUS S luminaires

WIDE LED

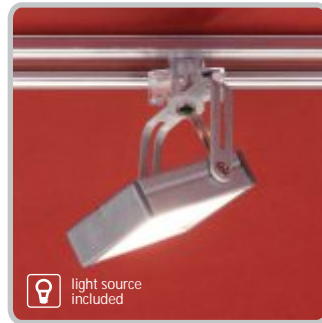


MIKRUS S WIDE LED
 12 V; 1,5 W; CRI (Ra)= 85; silver
 - 2700K; 1,5 W = 106 lm - [94090622](#)
 - 3000K; 1,5 W = 110 lm - [94100622](#)
 - 4000K; 1,5 W = 115 lm - [94110622](#)

PEN LED

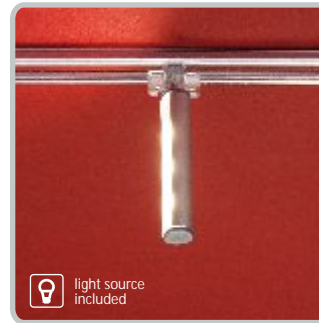


MIKRUS S PEN LED
 12 V; 1,5 W; 3led - CRI (Ra) = 80; anod.
 - 2700K; 1,5 W = 140 lm - [94160320](#)
 - 3000K; 1,5 W = 140 lm - [94140320](#)
 - 4000K; 1,5 W = 148 lm - [94150320](#)

SCENIK



MIKRUS S SCENIK
 12 V; GU5,3; max 35 W; chrome
[94080103](#)
 * in order to receive an offer for the light source, please contact our sales department

ASTOR



MIKRUS S ASTOR
 12 V; G4; max 20 W; chrome
[94130103](#)
 * in order to receive an offer for the light source, please contact our sales department



In luminaire MIKRUS S WIDE LED the Citizen 1,5 W LED light source was used - replacement for 10 W halogen lamp.

LED light sources have very good light parameters - high color fidelity.

Assembly or disassembly is possible without tools.

MIKRUS S scheme

example application

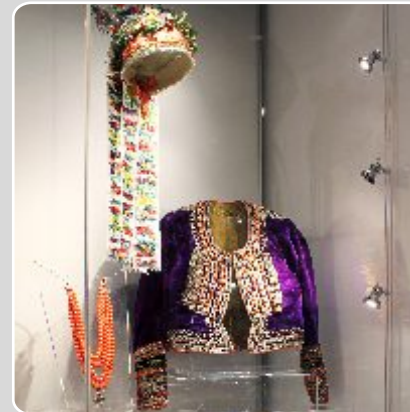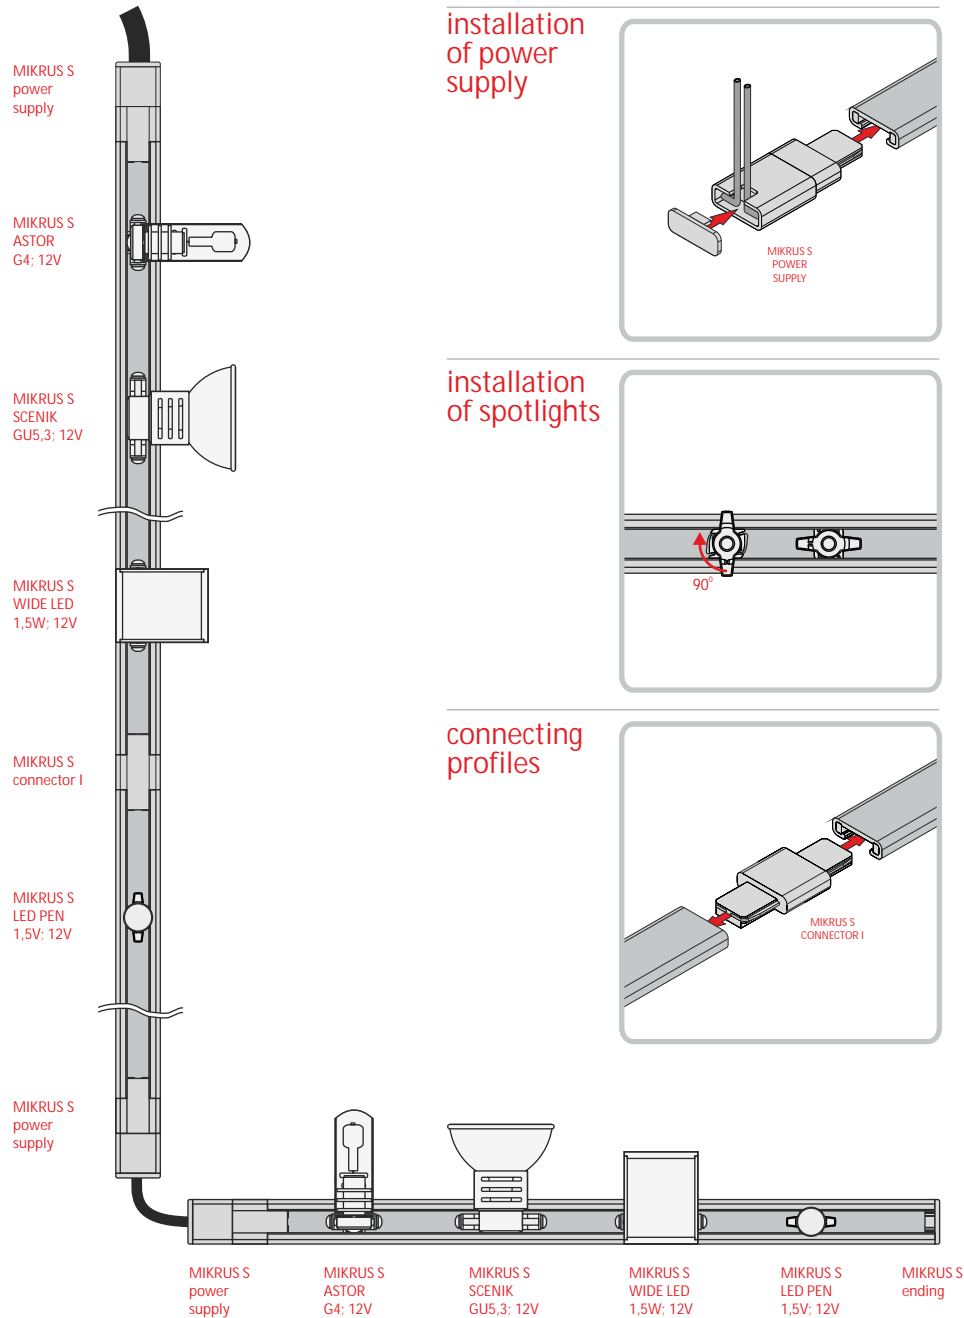



TOPMET light
K.Kłosowicz M.Wiśniewski Sp.J.

Ul. Ostrowska 354
61-312 Poznań, PL

tel. +48 61 872 75 00
fax +48 61 872 75 18



www.topmet.pl

The catalogue is not an offer under Polish Civil Code regulations.
Colors of particular products may vary slightly from color shown in pictures.
The dimensions given are approximate and can not be a reason for complaint.
TOPMET Company reserves the right to make technical changes.

brochure designer & photo: Katarzyna Samulska / 09.2013r.